

Electric instantaneous water heaters

KDE3 electronic



IP25

A

Electronically controlled heater.

Application



from 9kW



from 12kW



from 18kW

Most important advantages

Electronic control system

- stability and smooth regulation of water temperature
- the possibility to regulate water temperature from 30°C to 60°C (1°C step)


4 powers in 1 heater

- allows the user to select desired power level
- not applicable for 27kW version

The possibility to re-heat already pre-heated water

- inlet water temperature up to 60°C

Dimensions

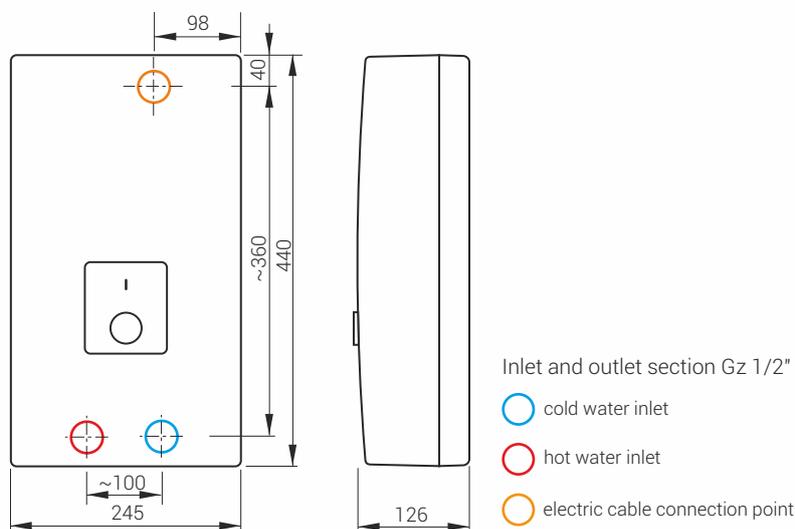

Technical data

Type	Rated power / Rated voltage	Supply water pressure (MPa)	Rated current (A)	Min. connecting wires section (mm ²)	Efficiency ($\Delta t=30^{\circ}$) (l/min.)
KDE3-09/12/15	9/11/12/15 kW / 400V 3~	0,1 - 1,0	3x13,0/15,9/17,3/21,7	4 x 1,5/2,5/2,5/2,5	4,3/5,2/5,8/7,2
KDE3-18/21/24	17/18/21/24 kW / 400V 3~	0,1 - 1,0	3x24,6/26,0/30,3/34,6	4 x 4/4/4/6	8,1/8,7/10,1/11,6
KDE3-27	27 kW / 400V 3~	0,1 - 1,0	3x39,0	4 x 6	13,0