

EPO2



IP25


A

2 year
warranty*

Most important advantages

Universal mounting

- can be installed in any position, above or below the sink

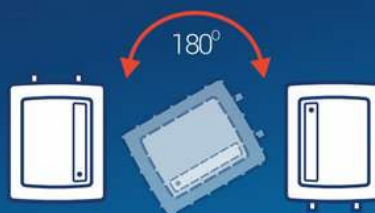

Fine-stream spray head

- comfortable use
- savings on water and energy up to 50%

The heater is perfect for the washbasin or kitchen sink

EPO2-6.2 - possibility to connect to:

- 1 phase 230~ installation
- 2-phase 3-phase 400V 2N~ installation

Application



from 3,5kW




from 5,5kW



from 4,4kW **

Dimensions

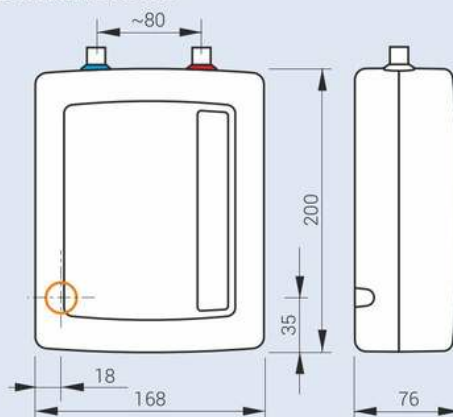

Inlet and outlet section:
EPO2 Gz 3/8"

- cold water inlet
- hot water inlet
- electric cable connection point

Technical data

Product code	Rated power / Rated voltage	Supply water pressure (MPa)	Rated current (A)	Min. connecting wires section (mm ²)	Efficiency ($\Delta t=30^\circ$) (l/min.)
EPO2-3	3,5 kW / 230V~	0,12 - 0,6	15,2	3 x 1,5	1,7
EPO2-4	4,4 kW / 230V~	0,12 - 0,6	19,1	3 x 2,5	2,1
EPO2-5	5,5 kW / 230V~	0,12 - 0,6	23,9	3 x 2,5	2,7
EPO2-6.2	6,0 kW / 230V~ or 400V 2N~	0,12 - 0,6	26,1 / *13	3 x 4 / *4 x 2,5	2,9

* values for 400V 2N~ connection

** it is possible to use 1 shot at the same time