


Warmup S3 Manifold

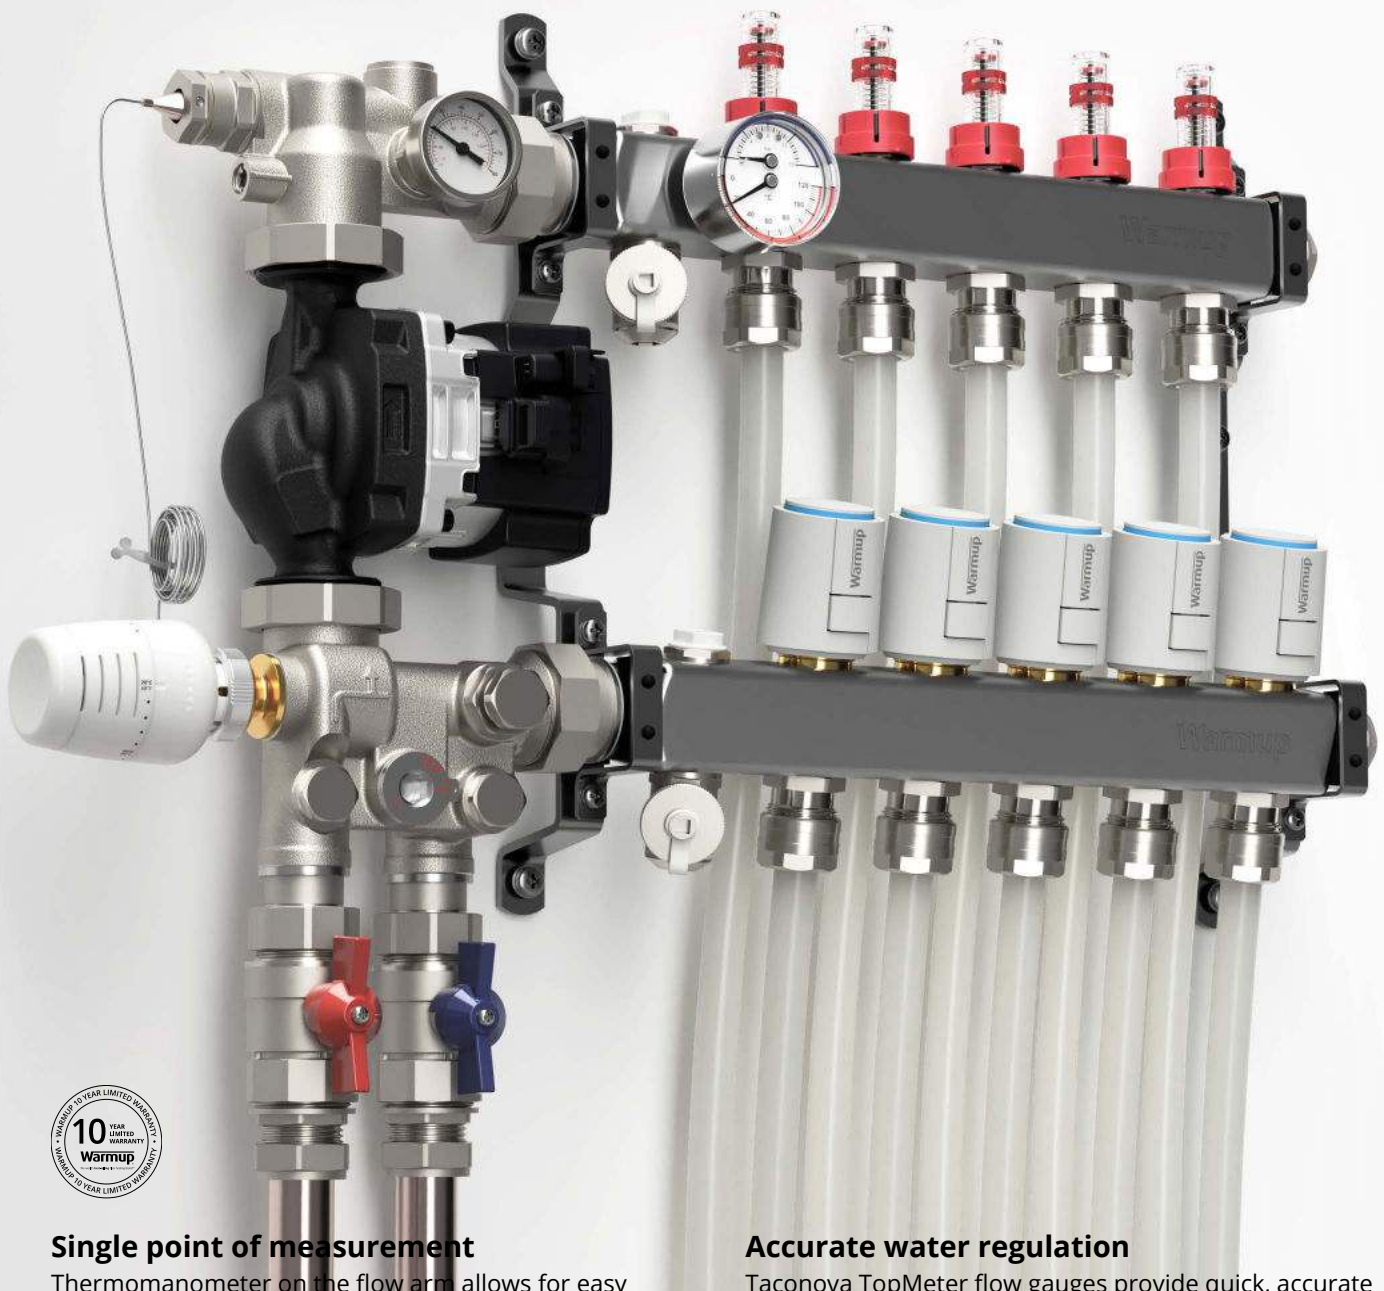

Single point of measurement

Thermomanometer on the flow arm allows for easy pressure testing, system commissioning and 'at a glance' operational checks thereafter

Reliable zone control

5th Generation Möhlenhoff actuators combine their renowned reliability with just 1W power usage

Accurate water regulation

Taconova TopMeter flow gauges provide quick, accurate and reliable water regulation

Choice of circuits


Available in 2-12 ports to match your requirements

Overview

The Warmup S3 Manifold range provides flexible zoning and water regulation for 2 to 12 underfloor heating circuits. Supplied complete with Taconova TopMeters, Fill/Drain Valves, Air Vents and a Thermomanometer, it is equipped with all the features needed to commission an underfloor heating system quickly and confidently.

Available separately, the Warmup S3 Mixing Unit provides water temperature regulation between 20°C and 60°C, for tailored system performance. Mixing units are required for all installations where the temperature of the water provided by the heat source either does or could exceed the design water temperature of the floor heating system. This includes all heat sources which intermittently 'over heat' due to sterilisation cycles or uncontrolled heating.


Manifold overview

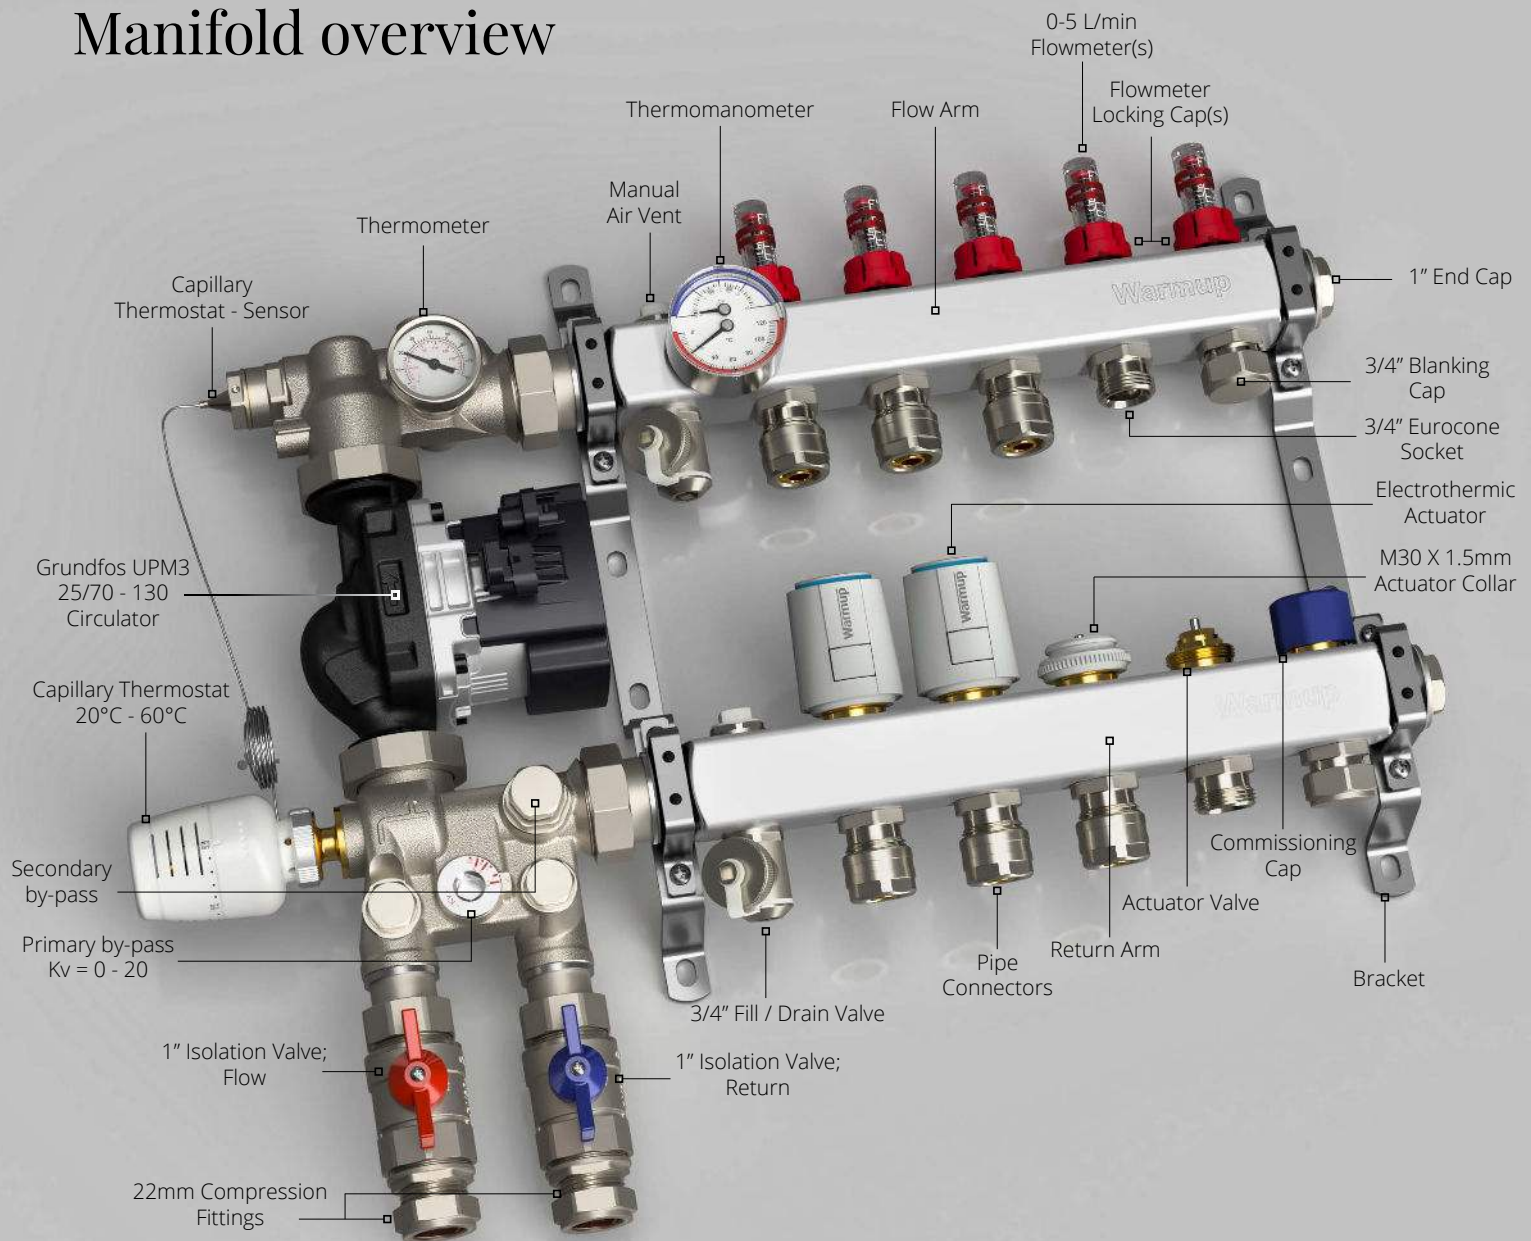

Technical specifications

Product code	WHS-M-S3-XX <i>XX = No. of ports; 2-12</i>
Material	304 Stainless Steel
Ports available	2 - 12
Temperature range	-5°C to +60°C
Max operating pressure	6 Bar
Max test pressure	10 Bar
Adjustment range	0 - 5 l/min
Measuring accuracy	±10% (of highest nominal value)
Manifold arm dimensions	40 mm x 40 mm
Pipe fitting centres	50 mm
Pipe fitting diameters	3/4" Eurocone

Dimensions

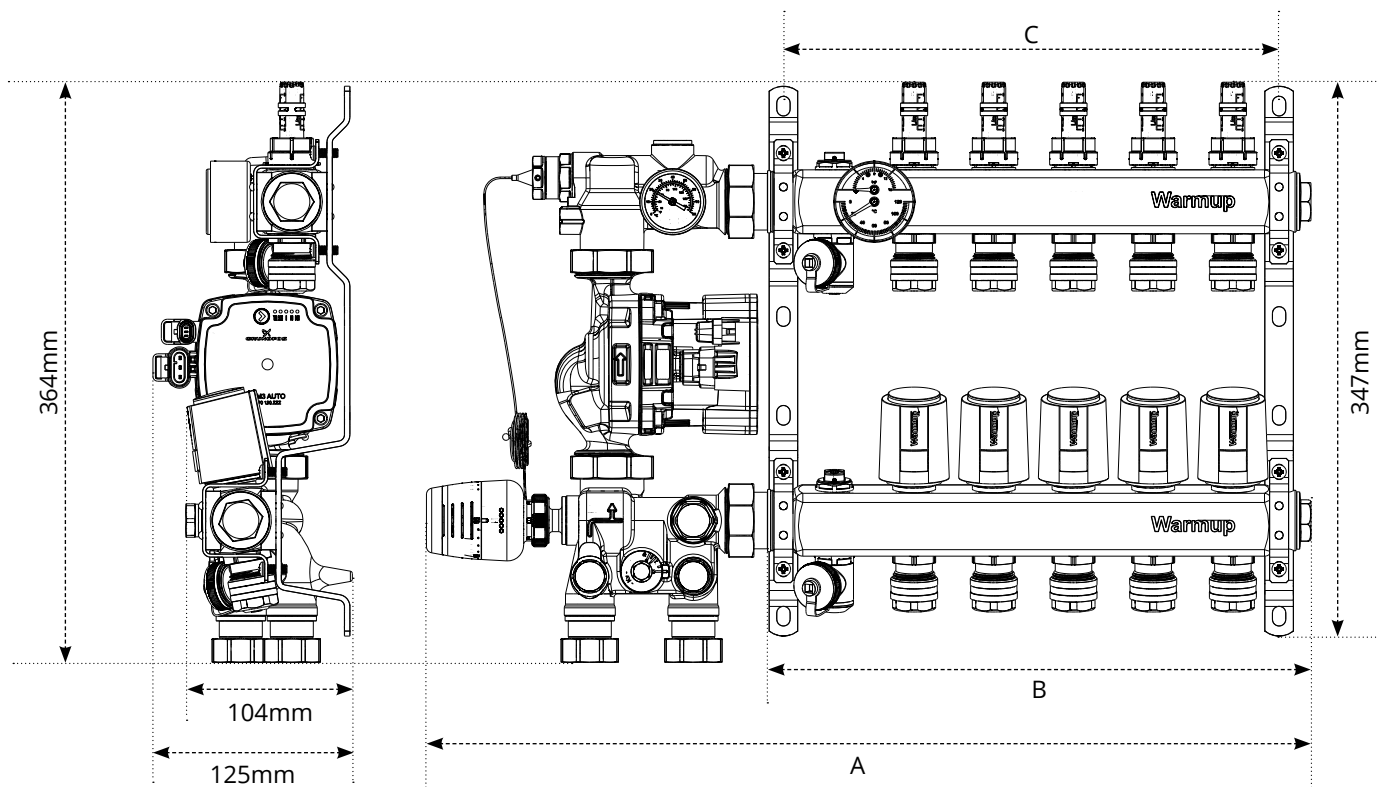

Type	Height (mm)	Depth (mm)	No. of Ports; Width										
			2	3	4	5	6	7	8	9	10	11	12
Including mixing unit (A)	364*	125	405	455	505	555	605	655	705	755	805	855	905
Excluding mixing unit (B)	347	102**	190	240	290	340	390	440	490	540	590	640	690
Bracket Spacing (C)			161	211	261	311	361	411	461	511	561	611	661

* Manifold height is 469mm when the mixing unit is installed with S3 isolation valves.

**** Manifold depth includes S3 Actuators installed; Manifold depth is 95mm without the Warmup S3 Mixing Unit, actuators or isolation valves installed.**

NOTE: If installing S3 isolation valves fitted to the Manifold, excluding mixing unit, add 105mm to the Manifold widths in the table.

Components & parts

Components



WHS-M-S3-xx
Warmup S3 Manifold
xx = 2-12 Ports



WHS-M-S3-MIX
For S3 Stainless Steel Manifold - 3 Port Valve -
Capillary Thermostat - Grundfos UPM3 Pump



WHS-M-S3-VALVES
1" Isolation Valves, c/w: 1" Unions,
22mm Compression Fittings



WHS-M-S3-ACT230
Electrothermic Actuator - 230V



ACC-CONNECT12x1.6
3/4" Eurocone to 12mm x 1.6mm



WHS-P-CONNECT
3/4" Eurocone to 16mm x 2.0mm



WHS-M-B-CAP
3/4" Blanking Cap

Parts



WHS-M-S3-ECAP
Spare Part - 1" End Cap



WHS-M-S3-BRACKET
Spare Part - Manifold Brackets (Pair)



WHS-M-S3-FLOW
Spare Part - S3 Manifold -
1/2" Flowmeter; 0-5 l/min



MFD-S3-ACTVALVE
Spare Part - Actuator Valve



WHS-M-S3-GAUGE
Spare Part - S3 Manifold -
1/4" Thermomanometer



MFD-S3-FDVALVE
Spare Part - S3 Manifold - Fill/Drain Valve



WHS-M-S3-ACTADPT
Spare Part - Actuator - 3/4" Collar

Contact

Warmup plc

www.warmup.co.uk T: 0345 345 2288
uk@warmup.com F: 0345 345 2299

Warmup plc ■ 704 Tudor Estate ■ Abbey Road ■ London ■ NW10 7UW ■ UK
Warmup GmbH ■ Ottostraße 3 ■ 27793 Wildeshausen ■ DE